





## Technical drawing





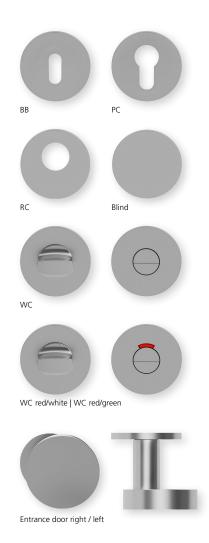

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left

PBU-RM1003OS PBU-RM10030 PBU-RM10031 PBU-RM10032 PBU-RM10038 PBU-RM10033 PBU-RM100331 PBU-RM100332 PBU-RM100353/63 PBU-RM1003853/863

## Technology:

Material: Stainless steel 304 to AISI standard

Surface: Stainless steel matt Door thickness:: 38 - 42 mm

Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)

Ball bearing technology, Technology:

Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty

DIN EN 1906 Use category 4

Use category:: Classification: **4** | **7** | **-** | **0** | **0** | **4** | **0** | **B** 

Stainless steel AISI 304 Ball bearing technology on both sides with only 5 mm rosette thickness horizontal stop Two compression springs Backlash-free connection between anchor, lever handle and square Two compression springs Quick pin connection without grub screw