



## Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.



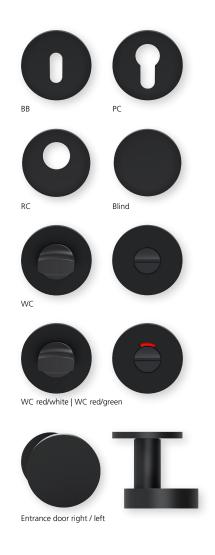

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left PBU-RBS10400S PBU-RBS10400 PBU-RBS10401 PBU-RBS10402 PBU-RBS10403 PBU-RBS10403 PBU-RBS104031 PBU-RBS104032 PBU-RBS104053/63 PBU-RBS1040853/863

## Technology:

Material: Surface: Door thickness::	Stainless steel 304 to AISI standard Black satin 38 - 42 mm	Stainless steel AISI 304 Ball bearing technology on both sides with
Square dimension::	8 mm square pin (8.5 mm spacer sleeve)	only 5 mm rosette thickness horizontal stop
Technology:	Ball bearing technology, Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty	Two compression springs Backlash-free connection between anchor, lever handle and square
Use category: :	DIN EN 1906 Use category 4 Classification: <b>4   7   -   0   0   4   0   B</b>	Two compression springs Quick pin connection without grub screw