



Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.



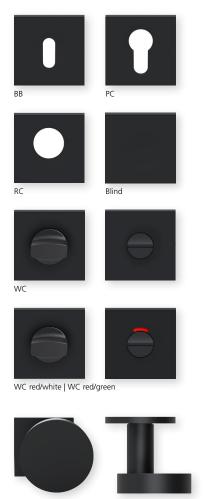

Entrance door right / left

Without key rosettes - Set BB - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left PBU-QBS1040OS PBU-QBS10400 PBU-QBS10401 PBU-QBS10402 PBU-QBS10403 PBU-QBS10403 PBU-QBS104031 PBU-QBS104032 PBU-QBS104053/63 PBU-QBS1040853/863

Technology:

Material: Surface: Door thickness:: Square dimension:: Technology:	Stainless steel 304 to AISI standard Black satin 38 - 42 mm 8 mm square pin (8.5 mm spacer sleeve) Ball bearing technology, Maintenance-free ball bearing made of har dened chrome steel 2 spring steel	only 5 mm rosette thickness Two compression springs
	dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty	Backlash-free connection between anchor, lever handle and square
Use category: :	DIN EN 1906 Use category 4 Classification: 4 7 - 0 0 4 0 B	Two compression springs Quick pin connection without grub screw