



Technical drawing





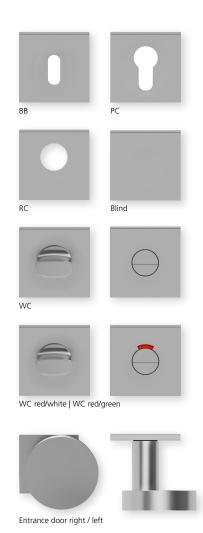

PBU-QM1040OS Without key rosettes - Set BB - Set Blind - Set PBU-QM10400 PBU-QM10401 PC - Set PBU-QM10402 RC - Set PBU-QM10408 WC - Set PBU-QM10403 WC red/white - Set PBU-QM104031 WC red/green - Set PBU-QM104032 Entrance door PC right/left PBU-QM104053/63 Entrance door RC right/left PBU-QM1040853/863

Techniodadgorawing:

Material: Stainless steel 304 to AISI standard

Surface: Stainless steel matt

Door thickness:: 38 - 42 mm

Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)

Technology: Ball bearing technology,

Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty

Use category: DIN EN 1906 Use category 4

Classification: **4 | 7 | - | 0 | 0 | 4 | 0 | B**

