





## Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.

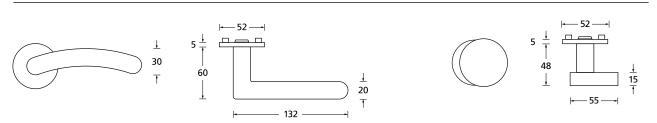

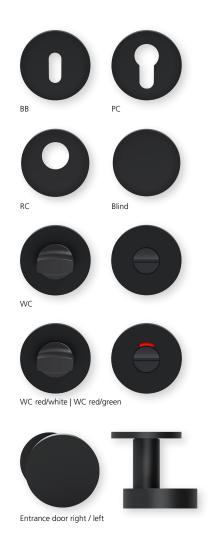

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left SBU-RBS1084OS SBU-RBS10840 SBU-RBS10841 SBU-RBS10842 SBU-RBS10843 SBU-RBS10843 SBU-RBS108431 SBU-RBS108432 SBU-RBS108453/63 SBU-RBS1084853/863

## Technology:

Material: Surface: Door thickness: Square dimension: Technology:	Stainless steel 304 to AISI standard Black satin 38 - 42 mm 8 mm square pin (8.5 mm spacer sleeve) Plain bearing technology, Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty	Stainless steel AISI 304 Plain bearing technology with horizontal stop Backlash-free connection between anchor, lever handle and square
Use category:	DIN EN 1906 Use category 3 Classification: <b>3   7   -   0   0   4   0   B</b>	Two compression springs Quick pin connection without grub screw