





## Technical drawing





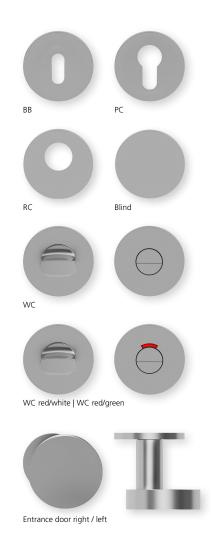

Without key rosettes - Set PBU-RM1084OS BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left

PBU-RM10840 PBU-RM10841 PBU-RM10842 PBU-RM10848 PBU-RM10843 PBU-RM108431 PBU-RM108432 PBU-RM108453/63 PBU-RM1084853/863

## Technology:

Use category::

Material: Stainless steel 304 to AISI standard

Surface: Stainless steel matt Door thickness:: 38 - 42 mm

Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)

Ball bearing technology, Technology:

Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides,

30-year functional warranty DIN EN 1906 Use category 4

Classification: **4** | **7** | **-** | **0** | **0** | **4** | **0** | **B** 

Stainless steel AISI 304 Ball bearing technology on both sides with only 5 mm rosette thickness horizontal stop Two compression springs Backlash-free connection between anchor, lever handle and square Two compression springs Quick pin connection without grub screw