







Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.



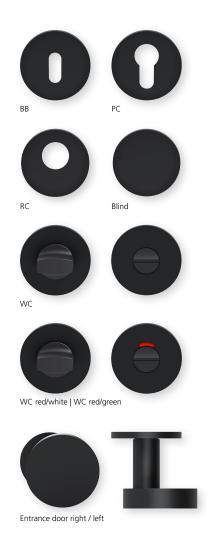

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left SBU-RBS1085OS SBU-RBS10850 SBU-RBS10851 SBU-RBS10852 SBU-RBS10858 SBU-RBS108531 SBU-RBS108531 SBU-RBS108532 SBU-RBS108533/63 SBU-RBS1085853/663

Technology:

Material: Surface: Door thickness: Square dimension: Technology:	Stainless steel 304 to AISI standard Black satin 38 - 42 mm 8 mm square pin (8.5 mm spacer sleeve) Plain bearing technology, Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty	Stainless steel AISI 304 Plain bearing technology with horizontal stop Backlash-free connection between anchor, lever handle and square
Use category:	DIN EN 1906 Use category 3 Classification: 3 7 - 0 0 4 0 B	Two compression springs Quick pin connection without grub screw