







Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.



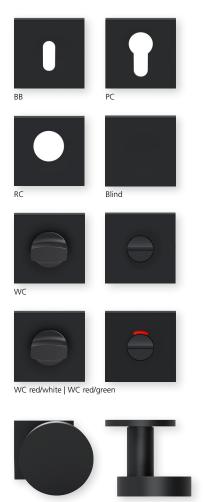

Entrance door right / left

Without key rosettes - Set BB - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left PBU-QBS1085OS PBU-QBS10850 PBU-QBS10851 PBU-QBS10852 PBU-QBS10853 PBU-QBS108531 PBU-QBS108531 PBU-QBS108532 PBU-QBS108553/63 PBU-QBS1085853/863

Technology:

Material: Surface: Door thickness:: Square dimension::	Stainless steel 304 to AISI standard Black satin 38 - 42 mm 8 mm square pin (8.5 mm spacer sleeve)	only 5 mm rosette thickness
Technology: Use category: :	Ball bearing technology, Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty DIN EN 1906 Use category 4	Two compression springs Backlash-free connection between anchor, lever handle and square Two compression springs
Use category: :	Classification: 4 7 - 0 0 4 0 B	Quick pin connection without grub screw