



Technical drawing





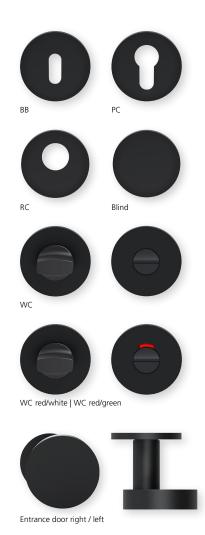

Without key rosettes - Set PBU-RBS1106OS PBU-RBS11060 BB - Set Blind - Set PBU-RBS11061 PC - Set PBU-RBS11062 RC - Set PBU-RBS11068 WC - Set PBU-RBS11063 PBU-RBS110631 WC red/white - Set WC red/green - Set PBU-RBS110632 Entrance door PC right/left PBU-RBS110653/63 Entrance door RC right/left PBU-RBS1106853/863

Technology:

Material: Stainless steel 304 to AISI standard

Surface: Black satin Door thickness:: 38 - 42 mm

Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)

Ball bearing technology, Technology:

Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty

DIN EN 1906 Use category 4

Use category:: Classification: **4** | **7** | **-** | **0** | **0** | **4** | **0** | **B**

Stainless steel AISI 304 only 5 mm rosette thickness Two compression springs Backlash-free connection between anchor, lever handle and square Two compression springs Quick pin connection without grub screw

Ball bearing technology on both sides with

horizontal stop