



Technical drawing





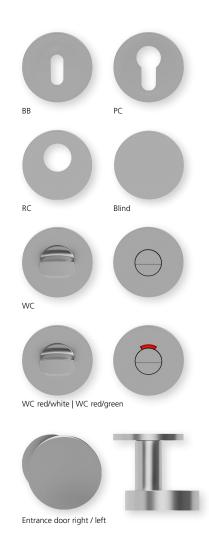

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left

PBU-RM1106OS PBU-RM11060 PBU-RM11061 PBU-RM11062 PBU-RM11068 PBU-RM11063 PBU-RM110631 PBU-RM110632 PBU-RM110653/63 PBU-RM1106853/863

Technology:

Material: Stainless steel 304 to AISI standard

Surface: Stainless steel matt Door thickness:: 38 - 42 mm

Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)

Ball bearing technology, Technology:

Maintenance-free ball bearing made of har dened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty

DIN EN 1906 Use category 4 Use category::

Classification: **4** | **7** | **-** | **0** | **0** | **4** | **0** | **B**

