



Technical drawing





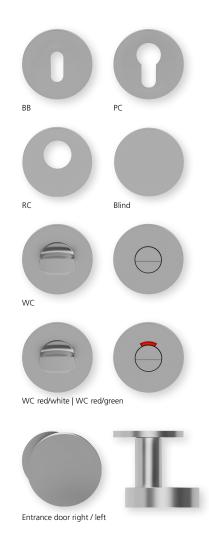

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left SBU-RM1106OS SBU-RM11060 SBU-RM11061 SBU-RM11062 SBU-RM11068 SBU-RM110631 SBU-RM110631 SBU-RM110632 SBU-RM110653/63 SBU-RM110653/63

Technology:

Material: Stainless steel 304 to AISI standard

Surface: Stainless steel matt

Door thickness: 38 - 42 mm

Square dimension: 8 mm square pin (8.5 mm spacer sleeve)

Technology: Plain bearing technology,

Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty

Use category: DIN EN 1906 Use category 3 Classification: **3** | **7** | - | **0** | **0** | **4** | **0** | **B**

only 5 mm rosette thickness

Backlash-free connection between anchor, lever handle and square

Two compression springs

Quick pin connection without grub screw