




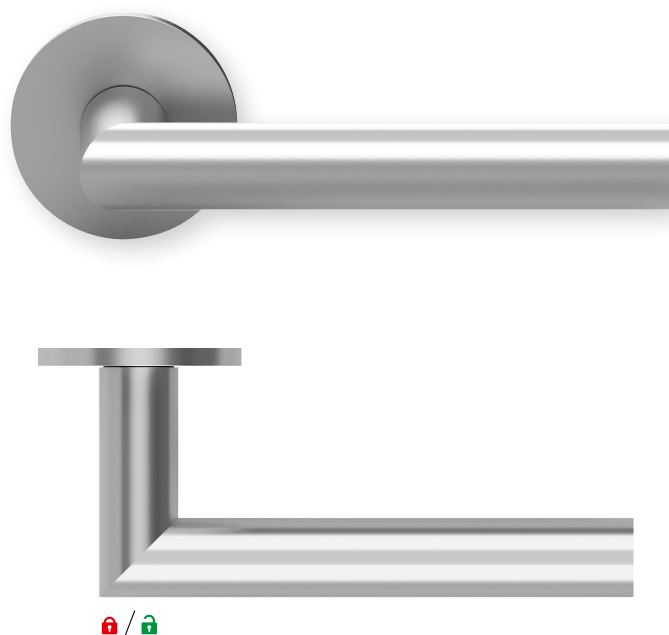


Technical drawing

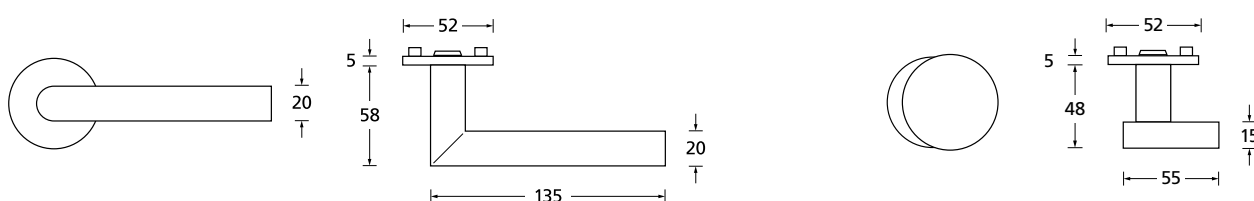


Hidden hero for interior doors

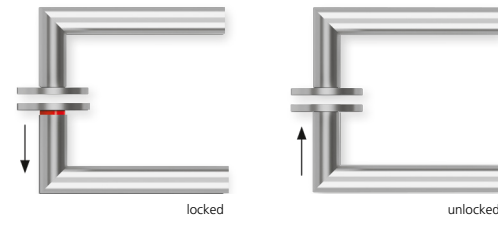


Hidden hero for WC and bathroom doors

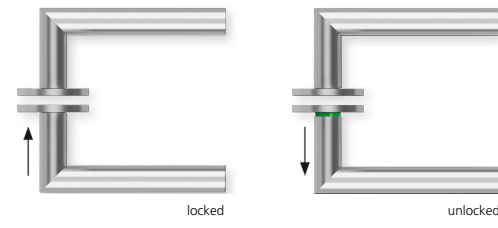

Hidden hero for WC and bathroom doors with display

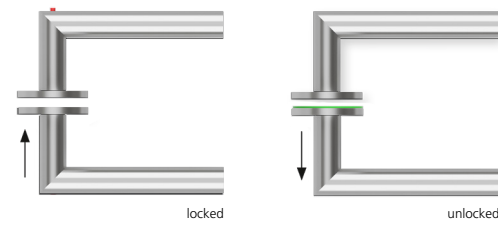

Hidden hero for apartment entrance doors with PC / RC rosette

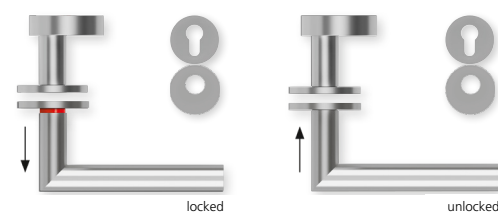

Interior DIN R
Interior DIN L
WC DIN R
WC DIN L
WC with display DIN R
WC with display DIN L
Entrance door PC DIN R
Entrance door PC DIN L
Entrance door RC DIN R
Entrance door RC DIN L

SMB-RM11064-R
SMB-RM11064-L
SMB-RM11063-R
SMB-RM11063-L
SMB-RM110632-R
SMB-RM110632-L
SMB-RM110654-R
SMB-RM110654-L
SMB-RM1106854-R
SMB-RM1106854-L

Technology:

Material: Stainless steel 304 to AISI standard
Surface: Stainless steel matt
Door thickness: 38 - 42 mm
Square dimension: 8 mm square pin (8.5 mm spacer sleeve)
Use category: DIN EN 1906 Use category 3
Classification: 3 | 7 | - | 0 | 0 | 5 | 0 | B

