



Technical drawing



All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.



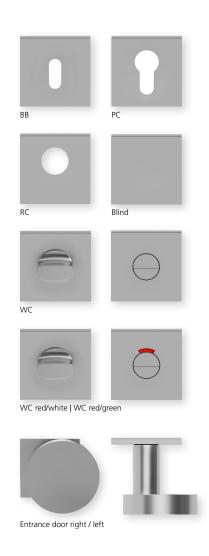

Without key rosettes - Set BB - Set Blind - Set PC - Set RC - Set WC - Set WC red/white - Set WC red/green - Set Entrance door PC right/left Entrance door RC right/left SBU-QM1106OS SBU-QM11060 SBU-QM11061 SBU-QM11062 SBU-QM11068 SBU-QM110631 SBU-QM110631 SBU-QM110632 SBU-QM110653/63 SBU-QM1106853/863

Technology:

Material: Surface: Door thickness: Square dimension: Technology:	Stainless steel 304 to AISI standard Stainless steel matt 38 - 42 mm 8 mm square pin (8.5 mm spacer sleeve) Plain bearing technology, Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty	Stainless steel AISI 304 Plain bearing technology with horizontal stop Backlash-free connection between anchor, lever handle and square
Use category:	DIN EN 1906 Use category 3 Classification: 3 7 - 0 0 4 0 B	Two compression springs Quick pin connection without grub screw