



Shape **1106** PVD titan satin on square rosette
Plain bearing technology **slidebloc®**

Colibri®
Innovation in your hand

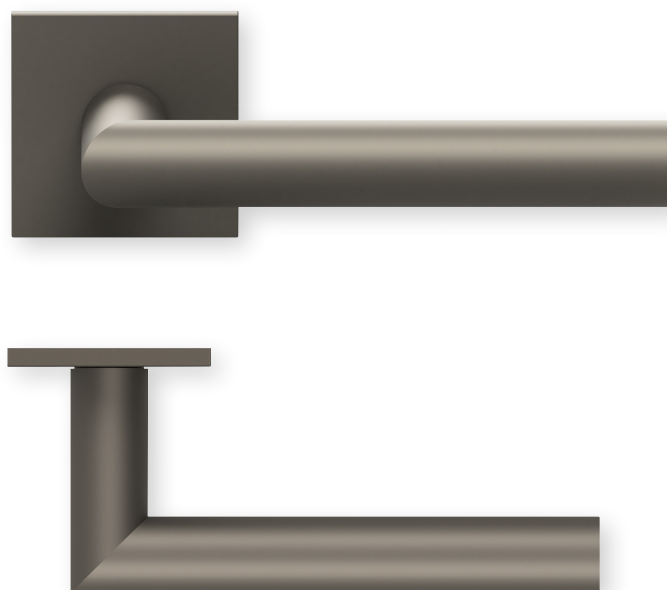

Technical drawing

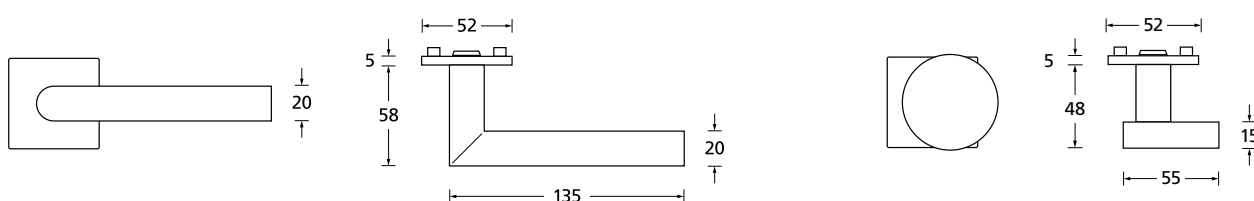

All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.

Status: Apr. 2025

Shape **1106** PVD titan satin on square rosette

Plain bearing technology **slidebloc®**



Without key rosettes - Set
BB - Set
Blind - Set
PC - Set
RC - Set
WC - Set
WC red/white - Set
WC red/green - Set
Entrance door PC right/left
Entrance door RC right/left

SBU-QTT11060S
SBU-QTT11060
SBU-QTT11061
SBU-QTT11062
SBU-QTT11068
SBU-QTT11063
SBU-QTT110631
SBU-QTT110632
SBU-QTT110653/63
SBU-QTT1106853/863

Technology:

Material:	Stainless steel 304 to AISI standard
Surface:	PVD titan satin
Door thickness:	38 - 42 mm
Square dimension:	8 mm square pin (8.5 mm spacer sleeve)
Technology:	Plain bearing technology, Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty
Use category:	DIN EN 1906 Use category 3 Classification: 3 7 - 0 0 3 0 B

