






Technical drawing

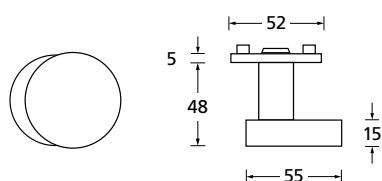


Hidden hero for interior doors

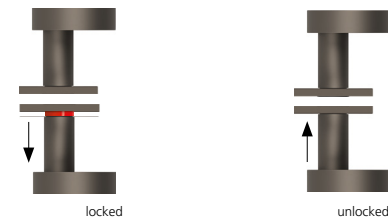

Hidden hero for WC and bathroom doors

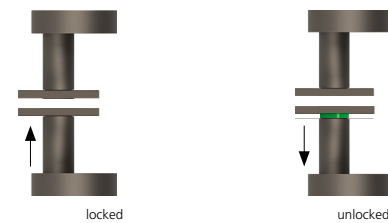

Hidden hero for apartment entrance doors with PC / RC rosette

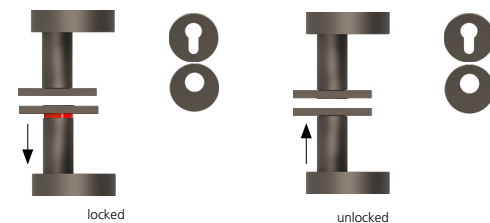

Interior DIN R
Interior DIN L
WC DIN R
WC DIN L
Entrance door PC DIN R
Entrance door PC DIN L
Entrance door RC DIN R
Entrance door RC DIN L

SMB-RTT16544-R
SMB-RTT16544-L
SMB-RTT16543-R
SMB-RTT16543-L
SMB-RTT16545-R
SMB-RTT16545-L
SMB-RTT165485-R
SMB-RTT165485-L

Technology:

Material: Stainless steel 304 to AISI standard
Surface: PVD Titan satin
Door thickness: 38 - 42 mm
Square dimension: 8 mm square pin (8.5 mm spacer sleeve)
Use category: DIN EN 1906 Use category 3
Classification: **3 | 7 | - | 0 | 0 | 4 | 0 | B**

